





Coriolis Massflowmeter

for liquids and gas



measuring
•
monitoring
•
analysing

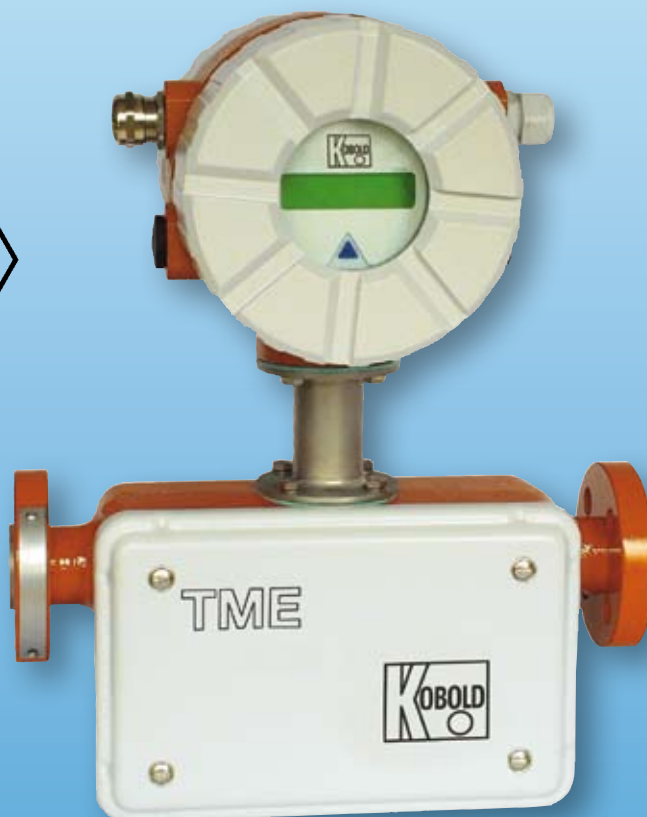

- Measuring range:
0 - 60 kg/h ... 0 - 60 000 kg/h water
- Accuracy: $\pm 0,15$ of reading
 \pm zero-point stability
- p_{max} : PN40 t_{max} : -40 ... +180 °C
- Connection: flange DN10... DN80,
 $\frac{1}{2}$ " ... 3" class 150
- Material: 1.4404 (316 L)/1.4571 (316 Ti)
- Options: contacts, analogue output with
HART®, PROFIBUS PA or Modbus RTU



KOBOLD companies worldwide

ALGERIA, ARGENTINA, AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHILE, CHINA, COLUMBIA, CZECHIA, DOMINICAN REPUBLIC, DUBAI, EGYPT, FRANCE, GERMANY, GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, MOROCCO, NETHERLANDS, PERU, PHILIPPINES, POLAND, ROMANIA, SINGAPORE, SLOVAKIA, SOUTH KOREA, SPAIN, SWITZERLAND, TAIWAN, THAILAND, TUNISIA, UKRAINE, USA, VENEZUELA, VIETNAM

KOBOLD Messring GmbH
Nordring 22-24
D-65719 Hofheim/Ts.
☎ +49(0)6192 299-0
Fax +49(0)6192 23398
E-Mail: info.de@kobold.com
Internet: www.kobold.com

Model:
TME



Description

The Kobold Mass Flow Meter type TME utilizes the Coriolis principle of operation to measure mass flow. Density and temperature are simultaneously monitored and volumetric flow is additionally calculated with these parameters. The TME Series is available with a direct mounted transmitter or in a remote mounted configuration.

The TME Series can be used to meter nearly all liquid or gaseous media and was especially designed to operate in many standard applications. It is applied in many different industrial branches. The TME Series is also used for precise dosing as well as in loading and unloading applications. Approvals for service in custody transfer (fiscal metering) applications are also available.

The TME is easy to install due to a rugged housing (cast iron). A superior efficient heating is optionally available.

Application Areas

- chemical industry
- petrochemical industry
- oil industry
- gas industry

Technical Data

Sensor

Measuring principle:	Coriolis
Measurable media:	liquids and gases
Materials:	
- flow tubes, splitter, flanges:	st. st.1.4404 (316 L)/ 1.4571 (316 Ti)
- housing:	cast iron
Process connections:	flanges acc. EN 1092, ASME B16.5, DIN2512 special connections on request
Nominal pressure:	PN 40, ASME CI 150/300 higher pressures on request
Process temperature:	-40 ... +180 °C (-40 ... +356 °F)
Ambient temperature:	-40 ... +100 °C (-40 ... +212 °F)
Protection class:	IP 65 (EN60529)
Certificates and approvals	
- explosion protection:	sensor circuits: intrinsically safe DMT 01 ATEX E 149 X Ⓔ II ½ G EEx ia IIC T6–T2 (approval for zone 0 inside flow tubes available)
- CE-marking:	pressure equipment directive 97 / 23 / EC

Transmitter UMC3

Material	
- housing:	aluminium (painted)
- display cover:	safety class
Mounting:	integrated or remote mounted (junction box or plug in connector)
Power supply:	19 - 36 V _{DC} , 24 V _{AC} +/-20 %, 90 - 265 V _{AC}
Outputs:	galvanically isolated
Current:	2 x 0(4) - 20 mA
Binary 1:	active, potential free 24 V _{DC} , max. 200 mA passive, optocoupler, U _i =30 V, I _i =200 mA, P _i =3 W
Frequency:	1 kHz
Binary 2:	passive, optocoupler, U _i =30 V, I _i =200 mA, P _i =3 W



Technical Data Continuation

Status:	passive, optocoupler, U _i =30 V, I _i =200 mA, P _i =3 W
Input binary:	counter reset
Ambient temperature:	-20...+60 °C (-4...140 °F) integrated transmitter with approvals 0 to 4 -20...+80 °C (-4...+176 °F) remote mounted transmitter with approvals 5 and 6
Protection class:	IP 68 (EN60529)
Communication:	HART® PROFIBUS PA Modbus RTU (RS 485)
Accuracy	
Liquid:	±0,15% of reading ± zero point stability
Gas:	±0,5% of reading ± zero point stability
Density (liquid):	±0,005 g/cm ³ with density calibration ±0,003 g/cm ³ with special density calibration
Volume:	±0,2% of reading ± zero point stability

Certifications and Approvals

Explosion protection:	BVS 05 ATEX E 021 X
Increased safety	
EEx e (connection):	Ⓔ II (1)2G EEx de [ia] IIC/ IIB T6-T3
Explosion proof	
EEx d (connection):	Ⓔ II (1)2G EEx d [ia] IIC/ IIB T6-T3
Signal output/ input:	intrinsically safe or not intrinsically safe FM XP-AIS/I/1/A B C D/T*: CD 06100 FMC XP-AIS/I/1/CD/T*: CD 06101 NEPSI approval cert No. GYJ06477
CE-marking:	explosion protection directive 94/9/EC EMC-directive 2004/108/EC
Electromagnetic compatibility:	EN 61000-6-3:2001 (emissions residential environments) EN 61000-6-2:1999 (immunity for industrial environments) EN 55011:1998+A1:1999 group1, class B (radio interference) EN 61000-4-2 to DIN EN 61000-4-6 EN 61000-4-8 EN 61000-4-11 EN 61000-4-29 EN 61326

Measuring Ranges

	Min. measuring range	Max. measuring range	Nominal (Δp=1 bar)	Zero point stability (of range)
Model	kg/h [lbs/min]	kg/h [lbs/min]	kg/h [lbs/min]	kg/h [lbs/min]
TME-S80	60 [2.2]	600 [22.0]	370 [13.6]	0.06 [0.00]
TME-S85	120 [4.4]	2500 [91.9]	1250 [45.9]	0.25 [0.01]
TME-S90	600 [22.0]	12 000 [440.9]	6000 [220.5]	1.2 [0.0]
TME-S95	3000 [110.2]	30 000 [1102.3]	19 000 [698.1]	3 [0.1]
TME-S58	6000 [220.5]	60 000 [2204.6]	60 000 [2204.6]*	6 [0.2]

Reference condition: according to IEC 770: Water at 20 °C

* (Δp=0.89 bar)



Order Details Sensor (Example: **TME-S80 101C 0 U 1 0 0 0**)

Model	Material	Measuring range ¹⁾ (water)	Process connection ²⁾	Heating/ Cooling element	Flow direction
TME-	S = stainless steel	80 = 0 - 600 kg/h (min. 0 - 60 kg/h)	301B = flange DN10 PN40 form B1 DIN EN 1092-1 201R = flange ½" class 150 RF ASME B16.5-2003	0 = without 1 = with connection Ermeto EO12 2 = with connection DN 15 PN40 form B1 DIN EN 1092-1 3 = with connection ½" class 150 RF ASME B16.5-2003	U = bottom to top O = top to bottom L = left to right R = right to left
		85 = 0 - 2500 kg/h (min. 0 - 120 kg/h)	305B = flange DN15 PN40 form B1 DIN EN 1092-1 202R = flange ¾" class 150 RF ASME B16.5-2003		
		90 = 0 - 12 000 kg/h (min. 0 - 600 kg/h)	309B = flange DN25 PN40 form B1 DIN EN 1092-1 203R = flange 1" class 150 RF ASME B16.5-2003		
		95 = 0 - 30 000 kg/h (min. 0 - 3000 kg/h)	321B = flange DN50 PN40 form B1 DIN EN 1092-1 206R = flange 2" class 150 RF ASME B16.5-2003		
		58 = 0 - 60 000 kg/h (min. 0 - 6000 kg/h)	331B = flange DN80 PN40 form B1 DIN EN 1092-1 208R = flange 3" class 150 RF ASME B16.5-2003		

Sensor	Approvals	Certificates	Special version
1 = integrated transmitter up to 100 °C 2 = integrated transmitter up to 150 °C 3³⁾ = remote mounted transmitter up to 100 °C, M20x1,5 4³⁾ = remote mounted transmitter up to 180 °C, M20x1,5 6³⁾ = remote mounted transmitter up to 100 °C, ½ NPT 7³⁾ = remote mounted transmitter up to 180 °C, ½ NPT	0 = without A = II ½ G Eex ia IIC T6 - T2, FM/FMC CL I, DIV 1, GPS ABCD T B = NEPSI	0 = without 1 = Certificate of compliance with the order 2.1 2 = Test report 2.2 B = Inspection certificate 3.1 incl. material certificate C = Inspection certificate 3.2 incl. material certificate	0 = without X = with (separate specification necessary)

Necessary details for dimensioning the TME instrument

- Medium
- Process temperature min./max.
- Ambient temperature min./max.
- Measuring range
- Operating pressure
- Viscosity
- Density

- ¹⁾ measuring range for other liquids and gases on request
- ²⁾ other flange-form on request
- ³⁾ please order cable glands separately, see accessories



Order Details Transmitter (Example: UMC3 - A 0 1 A 0 0)

Model	Kind of mounting	Display / Interface Board	Power supply	Output
UMC3-	<p>A = integrated transmitter, ½ NPT</p> <p>B = integrated transmitter, M 20x1,5</p> <p>C¹⁾ = remote mounted transmitter with terminal block, ½ NPT</p> <p>D¹⁾ = remote mounted transmitter with terminal block, M 20x1,5</p> <p>E¹⁾ = remote mounted transmitter with plug-in connector, ½ NPT</p> <p>F¹⁾ = remote mounted transmitter with plug-in connector, M20x1,5</p>	<p>0 = without</p> <p>1 = integrated in transmitter housing, ambient temperature up to 60 °C</p> <p>2²⁾ = remotable, separate board plus panel mounting adapter set</p>	<p>1 = 90 - 265 V_{AC}, 50 / 60 Hz</p> <p>2 = 19 - 36 V_{DC}, 24 V_{AC} (± 20 %), 50 / 60 Hz</p>	<p>A = analogue output 0(4) - 20 mA with/without HART®, pulse output passive U_m = 30 V_{DC}, status output passive U_m = 30 V_{DC}</p> <p>B³⁾ = analogue output 0(4) - 20 mA with/without HART®, pulse output active 24 V_{DC}, status output passive U_m = 30 V_{DC}</p> <p>D⁴⁾ = PROFIBUS PA (EEx ia IIC), all analogue and binary outputs disabled</p> <p>F⁵⁾ = Modbus RTU (RS485) analogue output 0(4) - 20 mA</p>

Approvals	Protection (signal output)
0 = without	0 = without
<p>1 = II(1)2G Eex de [ia] IIB/IIC T3-T6 for ambient temperature up to 60 °C</p> <p>2 = II(1)2G Eex d [ia] IIB/IIC T3-T6 for ambient temperature up to 60 °C</p> <p>3 = FM CL I, DIV 1, GPS ABCD, T*/FMC CL I, DIV 1, GPS CD, T* for ambient temperature up to 60 °C</p> <p>4 = NEPSI for ambient temperature up to 60 °C</p> <p>5 = II(1)2G Eex de [ia] IIB/IIC T3-T6 for ambient temperature up to 80 °C</p> <p>6 = II(1)2G Eex d [ia] IIB/IIC T3-T6 for ambient temperature up to 80 °C</p>	<p>1 = EEx ia</p> <p>2 = EEx e (not intrinsically safe)</p>

¹⁾ - incl. wall mounting bracket, pipe mounting bracket must be ordered separately (see accessories)
 - connection cable (sensor to transmitter) and cable gland must be ordered separately (see accessories)

²⁾ connection cable must be ordered separately

³⁾ signal output in EEx ia not possible

⁴⁾ not available with approval 3 und 4

⁵⁾ not available with approval 3, 4, 5, or 6 and not with signal output protection 2




Order Details Accessories (Example: **TMK - BL KK 005**)

Order number	Model	Version	Cable length/ Application area
			Cable length
TMK-	BL = connection cable	KK = sensor-transmitter with connection cable SK = sensor-transmitter cable end 1: plug (Harting Han® R23) cable end 2: cable connect SS = plug connection on both sides (Harting Han® R23) UB = transmitter-control unit plug connection	005 = 5 meter 010 = 10 meter 015 = 15 meter 030 = 30 meter 075 = 75 meter 150 = 150 meter 300 = 300 meter XXX = special length
	V = cable gland set	AU = integrated transmitter GU = remote mounted transmitter	Application area
			NEM20 = not Ex, M 20x1,5 NENPT = not Ex, ½ NPT DEIAM20 = EEx de - EEx ia, M 20x1,5 DEIANPT = EEx de - EEx ia, ½ NPT DEEM20 = EEx de - EEx e, M 20x1,5 DEENPT = EEx de - EEx e, ½ NPT
TM-	ROHRMONT = accessory for 2" pipe mounting		

Dimensions

Model	Process connection	A mm [inch]	B				C mm [inch]	F mm [inch]	G mm [inch]
			Integrated Transmitter		Remote mounted Transmitter				
			-40 ... 100 °C (-40 ... 212 °F)	-40 ... 150 °C (-40 ... 302 °F)	-40 ... 100 °C (-40 ... 212 °F)	-40 ... 180 °C (-40 ... 356 °F)			
TME-S80	DN10 PN40 ASME ½" Cl150/300	300 [11.8]	363 [14.3]	465 [18.3]	265 [10.4]	367 [14.4]	113 [4.4]	58 [2.3]	105 [4.1]
TME-S85	DN15 PN40 ASME ¾" Cl150/300	300 [11.8]	363 [14.3]	465 [18.3]	265 [10.4]	367 [14.4]	113 [4.4]	58 [2.3]	105 [4.1]
TME-S90	DN25 PN40 ASME 1" Cl150/300	400 [15.7]	430 [16.9]	532 [20.9]	332 [13.1]	434 [17.1]	173 [388.5]	65 [2.6]	113 [4.4]
TME-S95	DN50 PN40 ASME 2" Cl150/300	500 [19.7]	471 [18.5]	573 [22.6]	373 [14.7]	475 [18.7]	206 [8.1]	65 [2.6]	113 [4.4]
TME-S58	DN80 PN40 ASME 3" Cl150/300	600 [23.6]	557 [21.9]	659 [25.9]	459 [18.1]	561 [22.1]	290 [11.4]	77 [3.0]	137 [5.4]

Integrated Transmitter

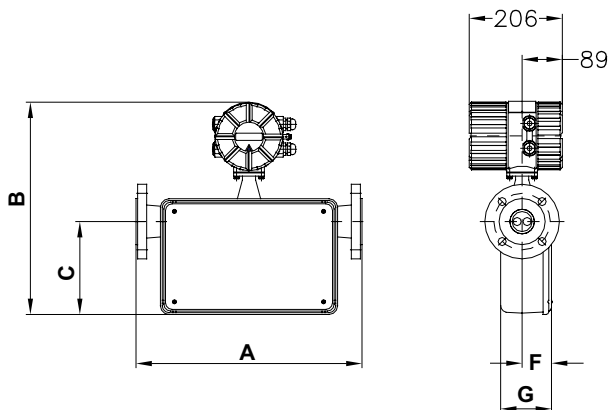

Remote Mounted Transmitter

